



Betaduct - Closed Slot Design

nominal size	external dimensions		part no. selection				carton quantity	
	W x H (mm)	width (mm)	height (mm)	grey RAL 7030PVC	white PVC	black PVC	blue PVC	no. of lengths 2m each
15 x 15	17	17	10460011	23600100	09000000	-	24	48
19 x 50	25	53	10460018	23600110	09500000	-	12	24
25 x 20	29	23	10460021	23600200	09010000	-	12	24
25 x 37.5	29	41	10460022	23600400	09510000	-	12	24
25 x 50	29	54	10460023	23600500	09030000	-	12	24
25 x 75	29	79	10460024	23600600	09040000	-	8	16
25 x 100	30	105	10460025	23600700	09530000	-	8	16
37.5 x 37.5	41	41	10460032	23600900	09540000	-	12	24
37.5 x 50	41	54	10460033	23601000	09550000	-	8	16
37.5 x 75	41	79	10460034	23601100	09560000	-	8	16
37.5 x 100	43	105	10460035	23601200	09570000	-	8	16
50 x 25	54	28	10460051	23601300	09380000	-	12	24
50 x 37.5	54	41	10460052	23601400	09590000	-	8	16
50 x 50	54	54	10460053	23601500	09060000	-	8	16
50 x 75	55	79	10460054	23601600	09070000	-	8	16
50 x 100	56	105	10460055	23601700	09620000	-	4	8
75 x 37.5	80	41	10460072	23601800	09630000	-	8	16
75 x 50	78	54	10460073	23601900	09640000	-	8	16
75 x 75	80	80	10460074	23602000	09090000	-	8	16
75 x 100	80	105	10460075	23602100	09660000	-	4	8
100 x 50	107	54	10460103	23602400	09680000	-	4	8
100 x 75	107	80	10460104	23602500	09690000	-	4	8
100 x 100	107	104	10460105	23602600	09700000	-	4	8
100 x 125	107	130	10460106	23603000	09710000	-	4	8
125 x 75	131	78	10460124	23602900	09400000	-	4	8


KEY INFORMATION

- MATERIALS**
Self extinguishing PVC
- SERVICE TEMPERATURE**
-15°C to +60°C (+5°F to +140°F)
- STANDARDS**
Base slots to DIN 43659
- FLAMMABILITY**
UL94 V-0 rated material
- APPROVALS**
UL & Lloyds Register
- RoHS compliant



TECHNICAL INFORMATION

- Excellent cable retention
- Enhanced protection for installers
- 20mm slot pitch
- 8mm slot width
- 24 sizes available in grey, white or black
- UL and Lloyds Register approved
- RoHS compliant

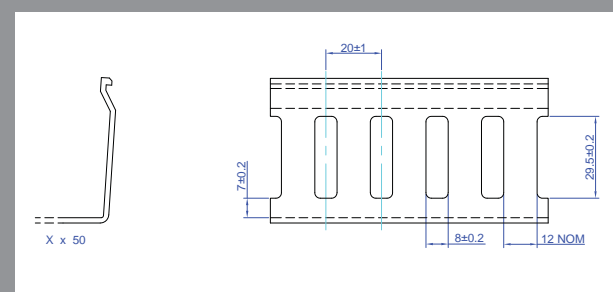

Other sizes may be available upon request, please contact the sales office for minimum quantities and lead times.

These are non-stock items and may require minimum order quantities. Please contact our sales office for availability and price.

The use of Betaduct Rivets is strongly recommended for the installation of all types of Betaduct