

Betaduct - Open Slot Design

nominal size	external dimensions		part no. selection				carton quantity		
	W x H (mm)	width (mm)	height (mm)	grey RAL 7030PVC	white PVC	black PVC	blue PVC	no. of lengths 2m each	total metres
19 x 50	25	53	10450018	23610110	09800000	-	-	12	24
25 x 37.5	29	41	10450022	23610400	09810000	-	-	12	24
25 x 50	29	54	10450023	23610500	09130000	09136000	-	12	24
25 x 75	29	79	10450024	23610600	09140000	09146000	-	8	16
25 x 100	30	105	10450025	23610700	09830000	09836000	-	8	16
37.5 x 37.5	41	41	10450032	23610900	09840000	-	-	12	24
37.5 x 50	41	54	10450033	23611000	09850000	09856000	-	8	16
37.5 x 75	39	79	10450034	23611100	09860000	09866000	-	8	16
37.5 x 100	43	105	10450035	23611200	09870000	09876000	-	8	16
50 x 25	54	28	10450051	23611300	09880000	-	-	12	24
50 x 37.5	54	41	10450052	23611400	09890000	-	-	8	16
50 x 50	54	54	10450053	23611500	09160000	09166000	-	8	16
50 x 75	55	79	10450054	23611600	09170000	09176000	-	8	16
50 x 100	56	105	10450055	23611700	09920000	09926000	-	4	8
75 x 37.5	80	41	10450072	23611800	09930000	-	-	8	16
75 x 50	78	54	10450073	23611900	09940000	-	-	8	16
75 x 75	80	80	10450074	23612000	09190000	09196000	-	8	16
75 x 100	80	105	10450075	23612100	09960000	09966000	-	4	8
100 x 50	107	54	10450103	23612400	09980000	-	-	4	8
100 x 75	107	80	10450104	23612500	09990000	09996000	-	4	8
100 x 100	107	104	10450105	23612600	10000000	10006000	-	4	8
100 x 125	107	130	10450106	23613000	10010000	-	-	4	8
125 x 75	131	78	10450124	23612900	09410000	-	-	4	8

KEY INFORMATION

MATERIALS

Self extinguishing PVC

SERVICE TEMPERATURE

-15°C to +60°C (+5°F to +140°F)

STANDARDS

Base slots to DIN 43659


FLAMMABILITY

UL94 V-0 rated material

APPROVALS

UL and Lloyds Register

RoHS compliant

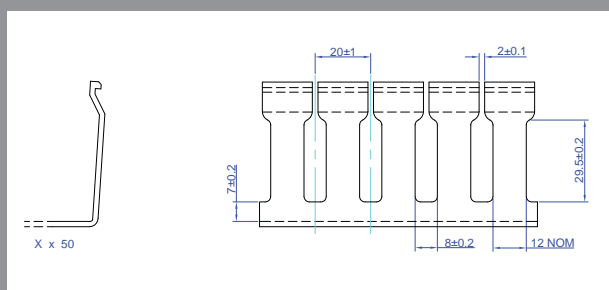

TECHNICAL INFORMATION

- Wide fingers give additional cable support
- Terminated wires can be re-routed easily
- 20mm slot pitch
- 8mm slot width
- 23 sizes available in grey, white, black or blue
- UL and Lloyds Register approved
- RoHS compliant

Other sizes may be available upon request, please contact the sales office for minimum quantities and lead times.

These are non-stock items and may require minimum order quantities. Please contact our sales office for availability and price.

The use of Betaduct Rivets is strongly recommended for the installation of all types of Betaduct