


# Betaduct - Solid Wall Design

nominal size	external dimensions		part no. selection				carton quantity		
	W x H (mm)	width (mm)	height (mm)	grey RAL 7030PVC	white PVC	black PVC	blue PVC	no. of lengths 2m each	total metres
15 x 15	17	17	10480011	23620100	09200000	-	-	24	48
19 x 50	25	53	10480018	23620110	10100000	-	-	12	24
25 x 20	29	23	10480021	23620200	09210000	-	-	12	24
25 x 37.5	29	41	10480022	23620400	10110000	-	-	12	24
25 x 50	29	54	10480023	23620500	09230000	-	-	12	24
25 x 75	29	79	10480024	23620600	09240000	-	-	8	16
25 x 100	29	105	10480025	23620700	10130000	-	-	24	48
37.5 x 37.5	41	41	10480032	23620900	10140000	-	-	12	24
37.5 x 50	41	54	10480033	23621000	10150000	-	-	8	16
37.5 x 75	41	79	10480034	23621100	10160000	-	-	8	16
37.5 x 100	43	105	10480035	23621200	10170000	-	-	8	16
50 x 25	54	28	10480051	23621300	10180000	-	-	12	24
50 x 37.5	54	41	10480052	23621400	10190000	-	-	8	16
50 x 50	54	54	10480053	23621500	09260000	-	-	8	16
50 x 75	55	79	10480054	23621600	09270000	-	-	8	16
50 x 100	56	105	10480055	23621700	10220000	-	-	4	8
75 x 37.5	80	41	10480072	23621800	10230000	-	-	8	16
75 x 50	78	54	10480073	23621900	10240000	-	-	8	16
75 x 75	80	80	10480074	23622000	09290000	-	-	8	16
75 x 100	80	105	10480075	23622100	10260000	-	-	4	8
100 x 50	107	54	10480103	23622400	10280000	-	-	4	8
100 x 75	107	80	10480104	23622500	10290000	-	-	4	8
100 x 100	107	104	10480105	23622600	10300000	-	-	4	8
100 x 125	107	130	10480106	23623000	10310000	-	-	4	8
125 x 75	131	78	10480124	23622900	09420000	-	-	4	8

## KEY INFORMATION

- MATERIALS**  
Self extinguishing PVC
- SERVICE TEMPERATURE**  
-15°C to +60°C (+5°F to +140°F)
- STANDARDS**  
Base slots to DIN 43659
- FLAMMABILITY**  
UL94 V-0 rated material
- APPROVALS**  
UL & Lloyds Register
- RoHS compliant

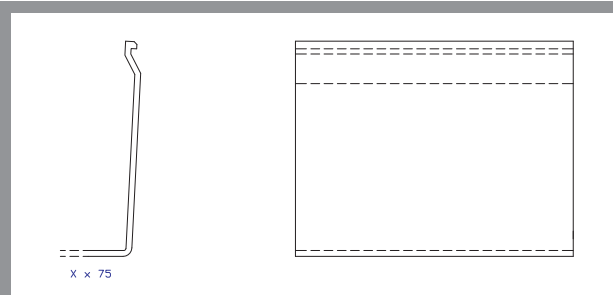

## TECHNICAL INFORMATION

- Ideal where no break-outs are required or side wall access is infrequent
- Complete cable protection
- 23 sizes available in grey, white or black
- UL and Lloyds Register approved
- RoHS compliant

Other sizes may be available upon request, please contact the sales office for minimum quantities and lead times.

These are non-stock items and may require minimum order quantities. Please contact our sales office for availability and price.

**The use of Betaduct Rivets is strongly recommended for the installation of all types of Betaduct**